


Bases tripolares verticales abiertas, 100 mm de distancia de embarrado
3 Pole vertical design fuse rails, 100 mm busbar spacing
(BTVA/BTVA-P)

Terminales Código XX / Terminals XX Code

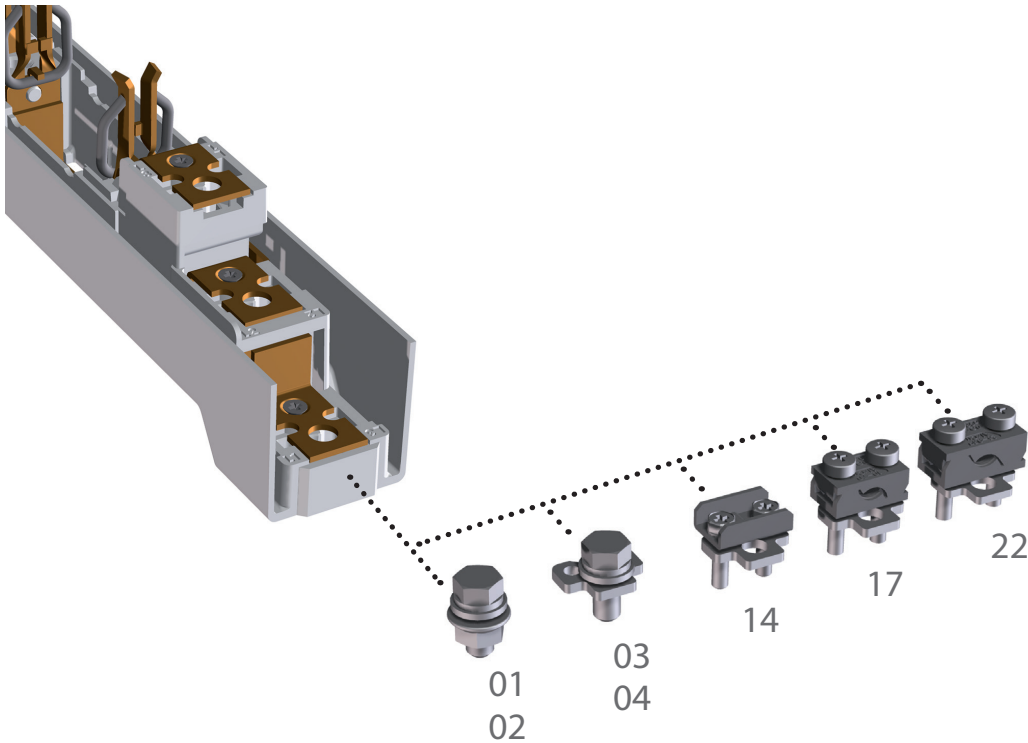

Código XX XX Code	Tipo de terminal Type of terminal	Par de apriete Torque (Nm)	Sección de cable / Cross section (mm ²)			
			rm	re	sm	se
01	Tornillo M8 M8 screw	12	Terminal de cable DIN 46235 Cable lugs DIN 46235 Max 95 mm ²			
02	Tornillo M8 Zn M8 screw Zn	12				
03*	Tornillo M8, A2+M5 M8 screw A2+M5 (15 mm)	12				
04**	Tornillo M8, A2+M5 M8 screw A2+M5 (18 mm)	12				
14	Terminal brida Bridge terminal	2,5	10-70	6-70	35-70	50-70
17	Terminal prisma-70 Prism terminal-70	2,5	10-70	10-70	35-70	50-70
22	Terminal prisma-95 Prism terminal-95	2,5	10-95	10-95	35-95	50-95

* Compatible con Terminal prisma-70 y Terminal brida.
 * Compatible with Prism terminal-70 and Bridge clamp.

** Compatible con Terminal prisma-95.

** Compatible with Prism terminal-95.