








Terminales para bases especiales (BTVC/BTVC-DT/BTVC-D)




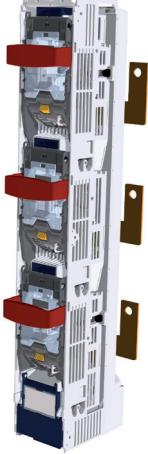
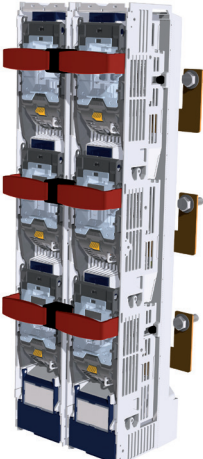
Terminals for special fuse switches (BTVC/BTVC-DT/BTVC-D)

2

| Imagen Picture | Base Fuse switch | Código XX XX Code | Tipo de terminal Type of terminal | Par de apriete Torque | Sección de cable Cross section |
|---|---|----------------------|---|--------------------------|--|
|  | BTVC / BTVC-DT Salida lateral / Acometida lateral Lateral Output / Lateral incoming | 04 | Tuerca inoxidable M12 Inserted nut stainless steel | 40 | Terminal de compresión DIN 46235 Cable lugs DIN 46235 2 x 25-300 mm ² (anchura máxima 43 mm) (max width 43 mm) |
|  | BTVC / BTVC-DT 910 A | 04 | Tuerca inoxidable M12 Inserted nut stainless steel | 40 | |
|  | BTVC / BTVC-DT 910 A | 08 | Acometida trasera Ø14 Rear plate | 40 | |
|  | BTVC / BTVC-DT 910 A | 08 | Acometida superior Ø14 Upper incoming | 40 | |
|  | BTVC-D / BTVC-D FS 800 / 1260 A | 09 | Tornillo 3 x Ø12x35 Bolt | 40 | |
|  | BTVC-D / BTVC-D FS 800 / 1260 A | 68 | Tornillo 4 x Ø12x35 Bolt | 40 | |
|  | BTVC-D / BTVC-D FS 800 / 1260 A | 04 | Tuerca inoxidable M12 Inserted nut stainless steel | 40 | |

Terminales para bases especiales (BTVC-S/BTVC-DS)
Terminals for special fuse switches (BTVC-S/BTVC-DS)

2

| Imagen Picture | Base Fuse switch | Código XX XX Code | Tipo de terminal Type of terminal | Par de apriete Torque | Sección de cable Cross section (mm ²) |
|---|--|----------------------|---|--------------------------|--|
|  | BTVC-S 1000 A | 04 | Tuerca inoxidable M12 Inserted nut stainless steel | 40 | Terminal de compresión DIN 46235 Cable lugs DIN 46235 2 x 25-300 mm ² (anchura máxima 43 mm) (max width 43 mm) |
|  | BTVC-DS 2000 A | 04 | Tuerca inoxidable M12 Inserted nut stainless steel | 40 | |
|  | BTVC-DS 2000 A | 03 | Tornillo M12 x 40 Bolt | - | |
|  | BTVC-S 1000 A Seccionamiento de embarrado Busbar connection | 08 | Tuerca inoxidable Ø14 Inserted nut stainless steel | 40 | |
|  | BTVC-S 2000 A Seccionamiento de embarrado Busbar connection | 08 | Diámetro 14 mm Hole diameter | 40 | |